

# Specification

FOR  
**FTTH Butterfly Optic Cable**  

---

**[ GJXH/GJXFH ]**  
**[GJYXCH/GJYXFCH]**


Canal autorizado:

**Unicor s.a.**

[www.unicorsa.com.ar](http://www.unicorsa.com.ar)

# 1.CABLE CONSTRUCTION

## 1.1. CROSS SECTIONAL DIAGRAM

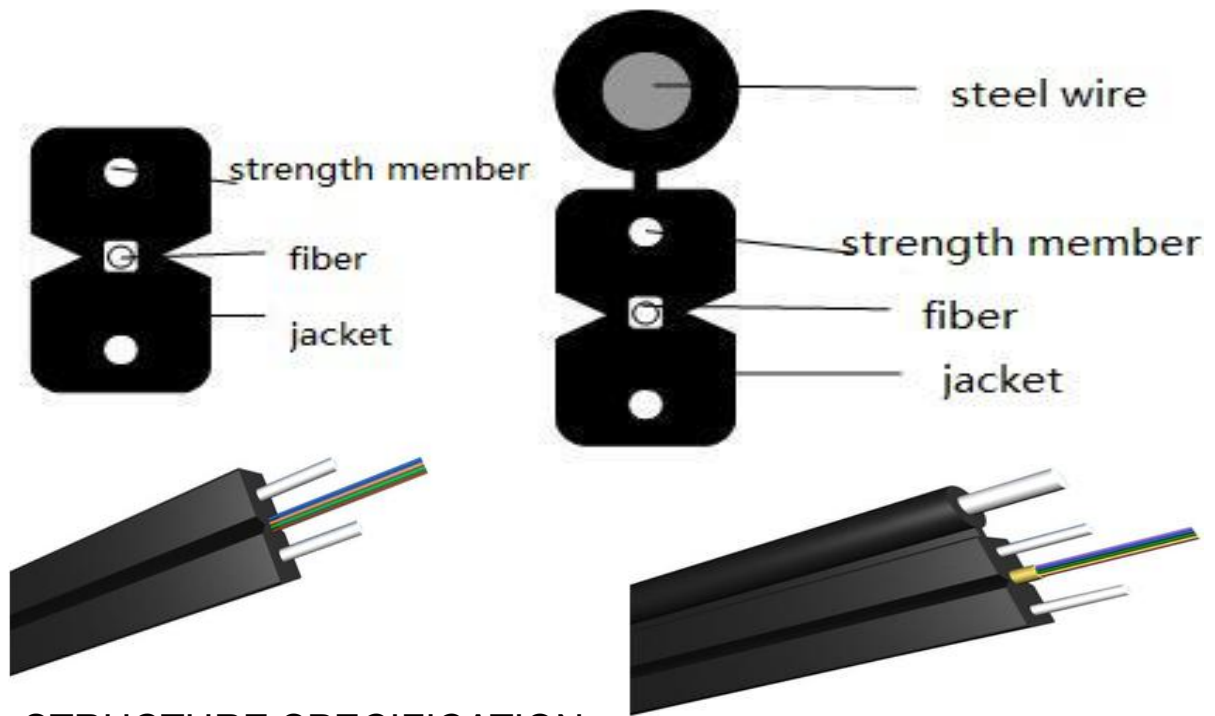

## 1.2. STRUCTURE SPECIFICATION

Cable Type	GJXH		GJXFH		GJYXCH		GJYXFCH	
Fiber count	1-2	4	1-2	4	1-2	4	1-2	4
The Color Code of The fibers	Natural/Blue,Orange,Green, Brown							
Strength Member	Steel wire		G-FRP/ K-FRP		Steel wire		G-FRP/ K-FRP	
Messenger wire	—		—		Steel wire		Steel wire	
Jacket Material:	LSZH		LSZH		LSZH		LSZH	
OD of cable(mm)	2.0×3.0±0.1				2.0×5.0±0.1			
Net weight ( kg/km)	11	11	8.8	9.2	20	20	19	19
Max.Tensile Loading (N)	200	200	80	80	600	600	600	600

Remarks:The Single core optical fiber color is natural.

## 2. Performance Parameters Of the Optical Fiber

### 2.1 Single Mode Fiber

ITEMS	UNITS	SPECIFICATION	
		G652D	G657A
Fiber type			
Attenuation	dB/km	1310nm ≤ 0.4 1550nm ≤ 0.3	
Chromatic Dispersion	ps/nm.km	1310nm ≤ 3.6 1550nm ≤ 18 1625nm ≤ 22	
Zero Dispersion Slope	ps/nm <sup>2</sup> .km	≤ 0.092	
Zero Dispersion Wavelength	nm	1300 ~ 1324	
Cut-off Wavelength ( $\lambda_{cc}$ )	nm	≤ 1260	
Attenuation vs. Bending (60mm x100turns)	dB	(30mm radius, 100ring) ≤ 0.1 @ 1625nm	(10mm radius, 1ring) ≤ 1.5 @ 1625nm
Mode Field Diameter	$\mu\text{m}$	9.2 ± 0.4 at 1310nm	9.2 ± 0.4 at 1310nm
Core-Clad Concentricity	$\mu\text{m}$	≤ 0.5	≤ 0.5
Cladding Diameter	$\mu\text{m}$	125±1	125±1
Cladding Non-circularity	%	≤ 0.8	≤ 0.8
Coating Diameter	$\mu\text{m}$	245±5	245±5
Proof Test	Gpa	≥ 0.69	≥ 0.69

### 2.2 Multi Mode Fiber

ITEMS	UNITS	SPECIFICATION				
		62.5/125	50/125	OM3-150	OM3-300	OM4-550
Fiber Core Diameter	$\mu\text{m}$	62.5±2.5	50.0±2.5	50.0±2.5		
Fiber Core Non-circularity	%	≤6.0	≤6.0	≤6.0		
Cladding Diameter	$\mu\text{m}$	125.0±1.0	125.0±1.0	125.0±1.0		
Cladding Non-circularity	%	≤2.0	≤2.0	≤2.0		
Coating Diameter	$\mu\text{m}$	245±10	245±10	245±10		
Core-Clad Concentricity	$\mu\text{m}$	≤12.0	≤12.0	≤12.0		

Coating Non-circularity		%	≤8.0	≤8.0	≤8.0		
Core-Clad Concentricity		μm	≤1.5	≤1.5	≤1.5		
Attenuation	850nm	dB/km	3.0	3.0	3.0		
	1300nm	dB/km	1.5	1.5	1.5		
OFL	850nm	MHz . km	≥160	≥200	≥700	≥1500	≥3500
	1300nm	MHz . km	≥300	≥400	≥500	≥500	≥500
The biggest theory numerical aperture		/	0.275±0.015	0.200±0.015	0.200±0.015		

### 3. Mechanical and Environmental Performance of the Cable

NO	ITEMS	TEST METHOD	ACCEPTANCE CRITERIA
1	Tensile Loading Test	#Test method:IEC 60794-1-E1 -. Long-tensile load: 0.5 times the short-term pulling force -. Short-tensile load: reference to clause 2.1 -. Cable length: ≥50m	-. Attenuation increment@1550nm:≤0.1dB -. No jacket cracking and fiber breakage
2	Crush Resistance Test	#Test method:IEC 60794-1-E3 -.Long load: 1000 N/100mm -.Short load: 2200 N/100mm Load time: 1 minutes	-. Attenuation increment@1550nm:≤0.4dB -. No jacket cracking and fiber breakage
3	Impact Resistance Test	#Test method:IEC 60794-1-E4 -.Impact height: 1 m -.Impact weigh: 100 g -.Impact point: ≥3 -.Impact frequency: ≥1/point	-. Attenuation increment@1550nm:≤0.4dB -. No jacket cracking and fiber breakage
4	Repeated Bending	#Test method:IEC 60794-1-E6 -.Mandrel diameter: 30H -.Subject weight: 2kg -.Bending frequency: 300times -.Bending speed: 2s/time	-. Attenuation increment@1550nm:≤0.4dB -. No jacket cracking and fiber breakage
5	Torsion Test	#Test method:IEC 60794-1-E7 -.Length: 1m -.Subject weight:2kg -.Angle: ±180 degree -.Frequency: ≥20/point	-. Attenuation increment@1550nm:≤0.4dB -. No jacket cracking and fiber breakage

6	Temperature Cycling Test	#Test method:IEC 60794-1-F1 -.Temperature steps: +20℃、 -10℃、+60℃、+20℃ -.Testing Time: 8 hours/step -.Cycle index: 2	-. Attenuation increment@1550nm:≤0.3dB -. No jacket cracking and fiber breakage
7	temperature	Operating :-10℃~+60℃ Store/Transport:-10℃~+60℃ Installation:-10℃~+60℃	

#### 4. FIBER OPTIC CABLE BENDING RADIUS

Static bending: ≥10 times than cable out diameter

Dynamic bending: ≥20 times than cable out diameter.

#### 5. PACKAGE AND MARK




##### 5.1 PACKAGE

Not allowed two length units of cable in one drum,. Two ends should be packed inside drum, reserve length of cable not less than 1meters.

##### 6.2 MARK

Cable Mark: length, brand

Drum Mark: Manufacturer, cable category, No. of drum, length, GW. direction of rotation, manufacturing date.

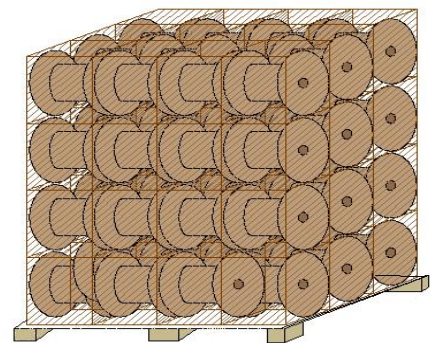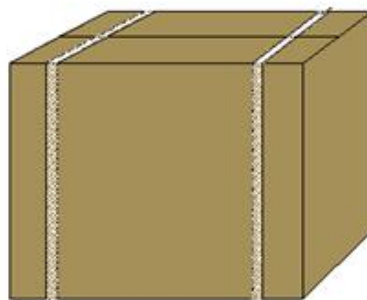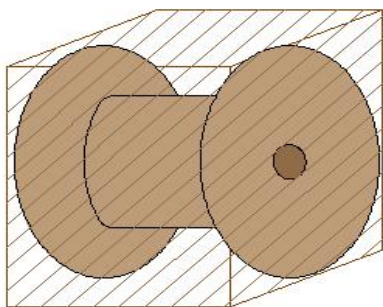

#### 7. TEST REPORT

Test report and certification supplied.