

Specification

FOR Armored Optic Cable --- [GYTA53]


Canal autorizado:

Unicor s.a.

www.unicorsa.com.ar

1. CABLE CONSTRUCTION

1.1 CROSS SECTIONAL DIAGRAM

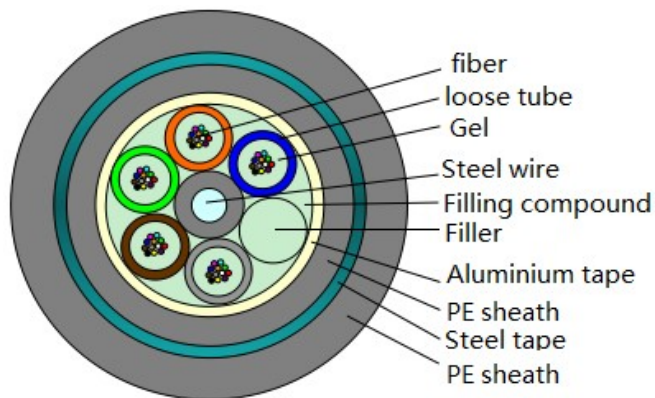

1.2 TECHNICAL SPECIFICATION

Fiber count		2~30	32~36	38~60	62~72	74~84
Loose Tube	OD(mm):	1.6 \pm 0.1	1.6 \pm 0.1	1.9 \pm 0.1	1.9 \pm 0.1	1.9 \pm 0.1
	Material:	PBT				
Max fiber count/tube		6	6	12	12	12
Core unit		5	6	5	6	7
Steel/Coating (mm)		1.4	1.7	1.4	2.0	2.0/2.6
Water Block Material:		Water blocking Compound				
Armored	inside	Aluminum Tape				
	outside	Steel Tape				
Sheath	inside	Non.0.8mm				
	outside	Non.1.5mm				
	Material:	Black PE / LSZH				
OD of cable (mm)		11.4	11.7	12.0	12.8	13.4
Net weight (kg/km)		130	128	140	164	176
Fiber count		86~96	98~108	110~120	122~132	134~144
Loose Tube	OD(mm):	1.9 \pm 0.1	1.9 \pm 0.1	1.9 \pm 0.1	1.9 \pm 0.1	1.9 \pm 0.1
	Material:	PBT				

Max fiber count/tube	12	12	12	12	12
Core unit	8	9	10	11	12
Steel/Coating (mm)	2.0/3.2	2.0/3.8	2.0/4.5	2.0/5.1	2.0/5.7
Water Block Material:	Water blocking Compound				
Armored	inside	Aluminum Tape			
	outside	Steel Tape			
Sheath	inside	Non.0.8mm			
	outside	Non.1.5mm			
	Material:	Black PE / LSZH			
OD of cable (mm)	14.0	14.6	15.3	15.9	16.5
Net weight (kg/km)	190	203	220	235	250

2. FIBER AND LOOSE BUFFER TUBE IDENTIFICATION

NO.	1	2	3	4	5	6	7	8	9	10	11	12
Tube Color	Blue	Orange	Green	Brown	Slate	White	Red	Black	Yellow	Violet	Pink	Aqua
NO.	1	2	3	4	5	6	7	8	9	10	11	12
Fiber Color	Blue	Orange	Green	Brown	Slate	natural	Red	Black	Yellow	Violet	Pink	Aqua

3.OPTICAL FIBER

3.1 Single Mode Fiber

LTEMS	UNITS	SPECIFICATION	
Fiber type		G652D	G657A
Attenuation	dB/km	1310nm ≤ 0.34 1550nm ≤ 0.21 1625nm ≤ 0.23	
Chromatic Dispersion	ps/nm.km	1310nm ≤ 3.5 1550nm ≤ 18 1625nm ≤ 22	
Zero Dispersion Slope	ps/nm ² .km	≤ 0.092	
Zero Dispersion Wavelength	nm	1300 ~ 1324	

Cut-off Wavelength (λ_{cc})	nm	≤ 1260	
Attenuation vs.Bending	1625nm	30mm radius,100ring ≤ 0.05 dB	15mm radius,10ring ≤ 1.0 dB
	1310nm	25mm radius,100ring ≤ 0.05 dB	15mm radius,10ring ≤ 0.25 dB
	1550nm	16mm radius,1ring ≤ 0.05 dB	10mm radius,1ring ≤ 0.75 dB
Mode Field Diameter	μm	8.7~ 9.5 at 1310nm 9.8~ 10.8 at 1550nm	8.4~ 9.2 at 1310nm 9.3~ 10.3 at 1550nm
Core-Clad Concentricity	μm	≤ 0.5	≤ 0.5
Cladding Diameter	μm	125.0 \pm 0.7	125.0 \pm 0.7
Cladding Non-circularity	%	≤ 1.0	≤ 0.7
Coating Diameter	μm	235~250	235~245
Proof Test	N	≥ 9.0	≥ 9.0

3.2 Multi Mode Fiber

LTEMS	UNITS	SPECIFICATION					
		OM1 62.5/125	OM2 50/125	OM3-150	OM3-300	OM4-550	
Fiber Core Diameter	μm	62.5 \pm 2.5	50.0 \pm 2.5	50.0 \pm 2.5			
Fiber Core Non-circularity	%	≤ 5.0	≤ 5.0	≤ 5.0			
Cladding Diameter	μm	125.0 \pm 1.0	125.0 \pm 1.0	125.0 \pm 1.0			
Cladding Non-circularity	%	≤ 1.0	≤ 0.6	≤ 0.6			
Coating Diameter	μm	245 \pm 7	245 \pm 10	245 \pm 7			
Coat-Clad Concentricity	μm	≤ 10.0	≤ 10.0	≤ 10.0			
Coating Non-circularity	%	≤ 6.0	≤ 6.0	≤ 6.0			
Core-Clad Concentricity	μm	≤ 1.5	≤ 1.0	≤ 1.0			
Attenuation	850nm	dB/km	≤ 2.7	≤ 2.4	≤ 2.4		
	1300nm	dB/km	≤ 0.6	≤ 0.6	≤ 0.6		
OFL	850nm	MHz.km	≥ 200	≥ 500	≥ 700	≥ 1500	≥ 3500
	1300nm	MHz.km	≥ 500	≥ 500	≥ 500	≥ 500	≥ 500
The biggest theory numerical aperture	/	0.275 \pm 0.015	0.200 \pm 0.015	0.200 \pm 0.015			
Group Refractive Index	850nm	1.496	1.482	1.482			

	1300nm	1.491	1.477	1.477
Proof Test	N	≥ 9.0	≥ 9.0	≥ 9.0

4. Mechanical and Environmental Performance of the Cable

NO.	ITEMS	TEST METHOD	ACCEPTANCE CRITERIA
1	Tensile Loading Test	#Test method:IEC 60794-1-E1 -. Long-tensile load: 1000N -.Short-tensile load: 3000N -.Cable length: ≥50m	-. Attenuation increment@1550nm:≤0.1dB -. No jacket cracking and fiber breakage
2	Crush Resistance Test	#Test method:IEC 60794-1-E3 -.Long load: 1000 N/100mm -.Short load: 3000 N/100mm Load time: 1 minutes	-. Attenuation increment@1550nm:≤0.1dB -. No jacket cracking and fiber breakage
3	Impact Resistance Test	#Test method: IEC 60794-1-E4 -.Impact height: 1M -.Impact weigh: 1000g -.Impact point: ≥5 -.Impact frequency: ≥3/point	-. Attenuation increment@1550nm:≤0.1dB -. No jacket cracking and fiber breakage
4	Repeated Bending	#Test method:IEC 60794-1-E6 -.Mandrel diameter: 20D (D = cable diameter) -.Subject weight: 25kg -.Bending frequency: 30 times -.Bending speed: 2s/time	-. Attenuation increment@1550nm:≤0.1dB -. No jacket cracking and fiber breakage
5	Torsion Test	#Test method:IEC 60794-1-E7 -.Length:1m -.Subject weight:25kg -.Angle: ±90 degree -.Frequency: ≥10/point	-. Attenuation increment@1550nm:≤0.1dB -. No jacket cracking and fiber breakage
6	Water Penetration Test	#Test method:IEC 60794-1-F5B -.Height of pressure head:1m -.Length of specimen:3m -.Test time: 24 hours	-. No leakage through the open cable end
7	Temperature Cycling Test	#Test method:IEC 60794-1-F1 -.Temperature steps: +20°C、—40°C、 +70°C、 +20°C -.Testing Time:24 hours/step -.Cycle index:2	-. Attenuation increment@1550nm:≤0.1dB -. No jacket cracking and fiber breakage

8	Drop Performance	#Test method:IEC 60794-1-E14 -.Testing length:30cm -.Temperature range: 70±2°C -.Testing Time: 24 hours	-. No filling compound drop out
9	Temperature	Operating: -40°C~+60°C Store/Transport: -50°C~+70°C Installation: -20°C~+60°C	

5. FIBER OPTIC CABLE BENDING RADIUS

Static bending: ≥10 times than cable out diameter

Dynamic bending: ≥20times than cable out diameter.

6.PACKAGE AND MARK


6.1 PACKAGE

Not allowed two length units of cable in one drum, two ends should be sealed,. Two ends should be packed inside drum, reserve length of cable not less than 3 meters.

6.2 MARK

Cable Mark: Brand、 Cable type、 Fiber type and counts、 Year of manufacture、 Length marking.

Mark

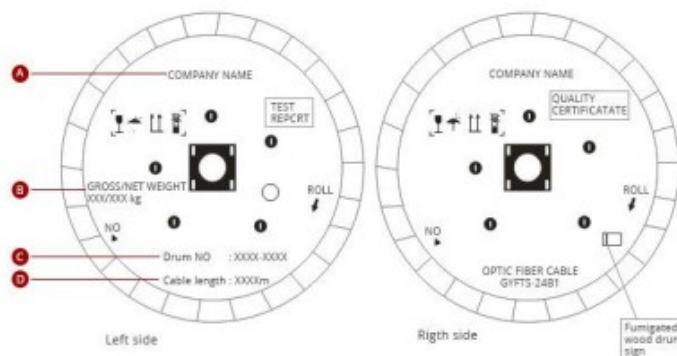

Usually we only attach Test Report on the out package of the cable, but we could also mark as your requirements, such as:

1. Company Name
2. Gross / Net weight
3. Drum No: XX
4. Cable Length : XX

7. TEST REPORT

Test report and certification supplied.