

# Specification

FOR  
**Self-Supporting  
Armored Optic Cable**

---

**[ GYTC8S ]**


Canal autorizado:

**Unicor s.a.**

[www.unicorsa.com.ar](http://www.unicorsa.com.ar)

## 1. CABLE CONSTRUCTION

### 1.1. CROSS SECTIONAL DIAGRAM

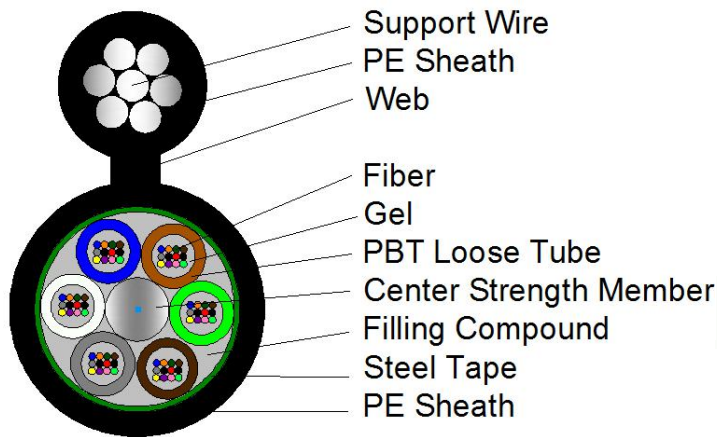

### 1.2. TECHNICAL SPECIFICATION

<b>Fiber count</b>		2~30	32~36	38~60	62~72	74~84
Loose Tube	OD(mm):	1.6 $\pm$ 0.1	1.6 $\pm$ 0.1	1.9 $\pm$ 0.1	1.9 $\pm$ 0.1	1.9 $\pm$ 0.1
	Material:	PBT				
Max fiber count/tube		6	6	12	12	12
Core unit		5	6	5	6	7
Steel/Coating (mm)		1.4	1.7	1.4	2.0	2.0/2.6
Water Block Material:		Water blocking Compound				
Armored		Corrugated Steel tape				
Supporting wire (mm)		7*1.0mm				
Sheath	Thickness:	Non. 1.5mm				
	Material:	PE				
OD of cable (mm)		8.8*15.6	9.1*15.9	9.5*16.3	10.0*16.8	10.6*17.2
Net weight (kg/km)		147	154	155	175	186
<b>Fiber count</b>		86~96	98~108	110~120	122~132	134~144
Loose Tube	OD(mm):	2.0 $\pm$ 0.1	2.0 $\pm$ 0.1	2.0 $\pm$ 0.1	2.0 $\pm$ 0.1	2.0 $\pm$ 0.1
	Material:	PBT				
Max fiber count/tube		12	12	12	12	12
Core unit		8	9	10	11	12
Steel/Coating (mm)		2.0/3.4	2.0/4.0	2.0/4.7	2.0/5.3	2.0/6.0
Water Block Material:		Water blocking Compound				
Armored		Corrugated Steel tape				
Supporting wire (mm)		7*1.0mm				

Sheath	Thickness:	Non. 1.5mm				
	Material:	PE				
OD of cable (mm)		11.2*18.0	11.8*18.6	12.5*19.3	13.1*19.9	13.7*20.5
Net weight (kg/km)		197	210	224	237	250

## 2. FIBER AND LOOSE BUFFER TUBE IDENTIFICATION

NO.	1	2	3	4	5	6	7	8	9	10	11	12
Tube Color	Blue	Orange	Green	Brown	Slate	White	Red	Black	Yellow	Violet	Pink	Aqua
NO.	1	2	3	4	5	6	7	8	9	10	11	12
Fiber Color	Blue	Orange	Green	Brown	Slate	natural	Red	Black	Yellow	Violet	Pink	Aqua

## 3.OPTICAL FIBER

### 3.1 Single Mode Fiber

LTEMS	UNITS	SPECIFICATION	
Fiber type		G652D	G657A
Attenuation	dB/km	1310nm ≤ 0.36 1550nm ≤ 0.22	
Chromatic Dispersion	ps/nm.km	1310nm ≤ 3.5 1550nm ≤ 18 1625nm ≤ 22	
Zero Dispersion Slope	ps/nm <sup>2</sup> .km	≤ 0.092	
Zero Dispersion Wavelength	nm	1300 ~ 1324	
Cut-off Wavelength (λ <sub>cc</sub> )	nm	≤ 1260	
Attenuation vs. Bending (60mm x100turns)	dB	(30mm radius, 100ring) ≤ 0.1 @ 1625nm	(10mm radius, 1ring) ≤ 1.5 @ 1625nm
Mode Field Diameter	μm	9.2 ± 0.4 at 1310nm	9.2 ± 0.4 at 1310nm
Core-Clad Concentricity	μm	≤ 0.5	≤ 0.5
Cladding Diameter	μm	125±1	125±1
Cladding Non-circularity	%	≤ 0.8	≤ 0.8
Coating Diameter	μm	245±5	245±5

Proof Test	Gpa	≥ 0.69	≥ 0.69
------------	-----	--------	--------

### 3.2 Multi Mode Fiber

LTEMS	UNITS	SPECIFICATION					
		62.5/125	50/125	OM3-150	OM3-300	OM4-550	
Fiber Core Diameter	μm	62.5±2.5	50.0±2.5	50.0±2.5			
Fiber Core Non-circularity	%	≤6.0	≤6.0	≤6.0			
Cladding Diameter	μm	125.0±1.0	125.0±1.0	125.0±1.0			
Cladding Non-circularity	%	≤2.0	≤2.0	≤2.0			
Coating Diameter	μm	245±10	245±10	245±10			
Coat-Clad Concentricity	μm	≤12.0	≤12.0	≤12.0			
Coating Non-circularity	%	≤8.0	≤8.0	≤8.0			
Core-Clad Concentricity	μm	≤1.5	≤1.5	≤1.5			
Attenuation	850nm	dB/km	3.0	3.0	3.0		
	1300nm	dB/km	1.5	1.5	1.5		
OFL	850nm	MHz . km	≥160	≥200	≥700	≥1500	≥3500
	1300nm	MHz . km	≥300	≥400	≥500	≥500	≥500
The biggest theory numerical aperture	/	0.275±0.015	0.200±0.015	0.200±0.015			

## 4. Mechanical and Environmental Performance of the Cable

NO.	ITEMS	TEST METHOD	ACCEPTANCE CRITERIA
1	Tensile Loading Test	#Test method:IEC 60794-1-E1 -. Long-tensile load: 1000N -. Short-tensile load: 3000N -. Cable length: ≥50m	-. Attenuation increment@1550nm:≤0.1dB -. No jacket cracking and fiber breakage
2	Crush Resistance Test	#Test method:IEC 60794-1-E3 -.Long load: 300 N/100mm -.Short load: 1000 N/100mm Load time: 1 minutes	-. Attenuation increment@1550nm:≤0.1dB -. No jacket cracking and fiber breakage

3	Impact Resistance Test	<p>#Test method:IEC 60794-1-E4</p> <ul style="list-style-type: none"> <li>-Impact height: 1 m</li> <li>-Impact weigh: 450 g</li> <li>-Impact point: ≥5</li> <li>-Impact frequency: ≥3/point</li> </ul>	<ul style="list-style-type: none"> <li>- Attenuation increment@1550nm:≤0.1dB</li> <li>- No jacket cracking and fiber breakage</li> </ul>
4	Repeated Bending	<p>#Test method:IEC 60794-1-E6</p> <ul style="list-style-type: none"> <li>-Mandrel diameter: 20D (D = cable diameter)</li> <li>-Subject weight: 15kg</li> <li>-Bending frequency: 30 times</li> <li>-Bending speed: 2s/time</li> </ul>	<ul style="list-style-type: none"> <li>- Attenuation increment@1550nm:≤0.1dB</li> <li>- No jacket cracking and fiber breakage</li> </ul>
5	Torsion Test	<p>#Test method:IEC 60794-1-E7</p> <ul style="list-style-type: none"> <li>-Length: 1m</li> <li>-Subject weight:15kg</li> <li>-Angle: ±180 degree</li> <li>-Frequency: ≥10/point</li> </ul>	<ul style="list-style-type: none"> <li>- Attenuation increment@1550nm:≤0.1dB</li> <li>- No jacket cracking and fiber breakage</li> </ul>
6	Water Penetration Test	<p>#Test method:IEC 60794-1-F5B</p> <ul style="list-style-type: none"> <li>-Height of pressure head: 1m</li> <li>-Length of specimen: 3m</li> <li>-Test time: 24 hours</li> </ul>	<ul style="list-style-type: none"> <li>- No leakage through the open cable end</li> </ul>
7	Temperature Cycling Test	<p>#Test method:IEC 60794-1-F1</p> <ul style="list-style-type: none"> <li>-Temperature steps: +20℃、-40℃、+70℃、+20℃</li> <li>-Testing Time: 24 hours/step</li> <li>-Cycle index: 2</li> </ul>	<ul style="list-style-type: none"> <li>- Attenuation increment@1550nm:≤0.1dB</li> <li>- No jacket cracking and fiber breakage</li> </ul>
8	Drop Performance	<p>#Test method:IEC 60794-1-E14</p> <ul style="list-style-type: none"> <li>-Testing length: 30cm</li> <li>-Temperature range: 70±2℃</li> <li>-Testing Time: 24 hours</li> </ul>	<ul style="list-style-type: none"> <li>- No filling compound drop out</li> </ul>
9	Temperature	<p>Operating:-40℃~+60℃</p> <p>Store/Transport :-50℃~+70℃</p> <p>Installation -20℃~+60℃</p>	

## 5. FIBER OPTIC CABLE BENDING RADIUS

Static bending: ≥10 times than cable out diameter

Dynamic bending: ≥20times than cable out diameter.

## **6. PACKAGE AND MARK**

### **6.1 PACKAGE**

Not allowed two length units of cable in one drum, two ends should be sealed,. Two ends should be packed inside drum, reserve length of cable not less than 3 meters.

### **6.2 MARK**

Cable Mark: Brand、Cable type、Fiber type and counts、Year of manufacture、Length marking 。

## **7. TEST REPORT**

Test report and certification supplied.